


DRAWING	CHECK	CHECK	APPROVAL
L.H.H.	<i>[Signature]</i>	<i>[Signature]</i>	<i>[Signature]</i>
SA-804 HIC THUNDER 1000			
TITLE			SCHMATIC DIAGRAM
DOCUMENT NUMBER			S-8934-01 (S-12-7)
DATE			MAR 25 1980


PRINTED CIRCUIT BOARD DIAGRAM

BASIC : SA - 8934		DWG. NO : AAMA222-01	
BUYER : SA - 8934		FILE NO : A - 10 - 7	
DRAWING	CHECK	CHECK	APPROVAL
L. H. H	<i>H</i>		<i>MB</i>

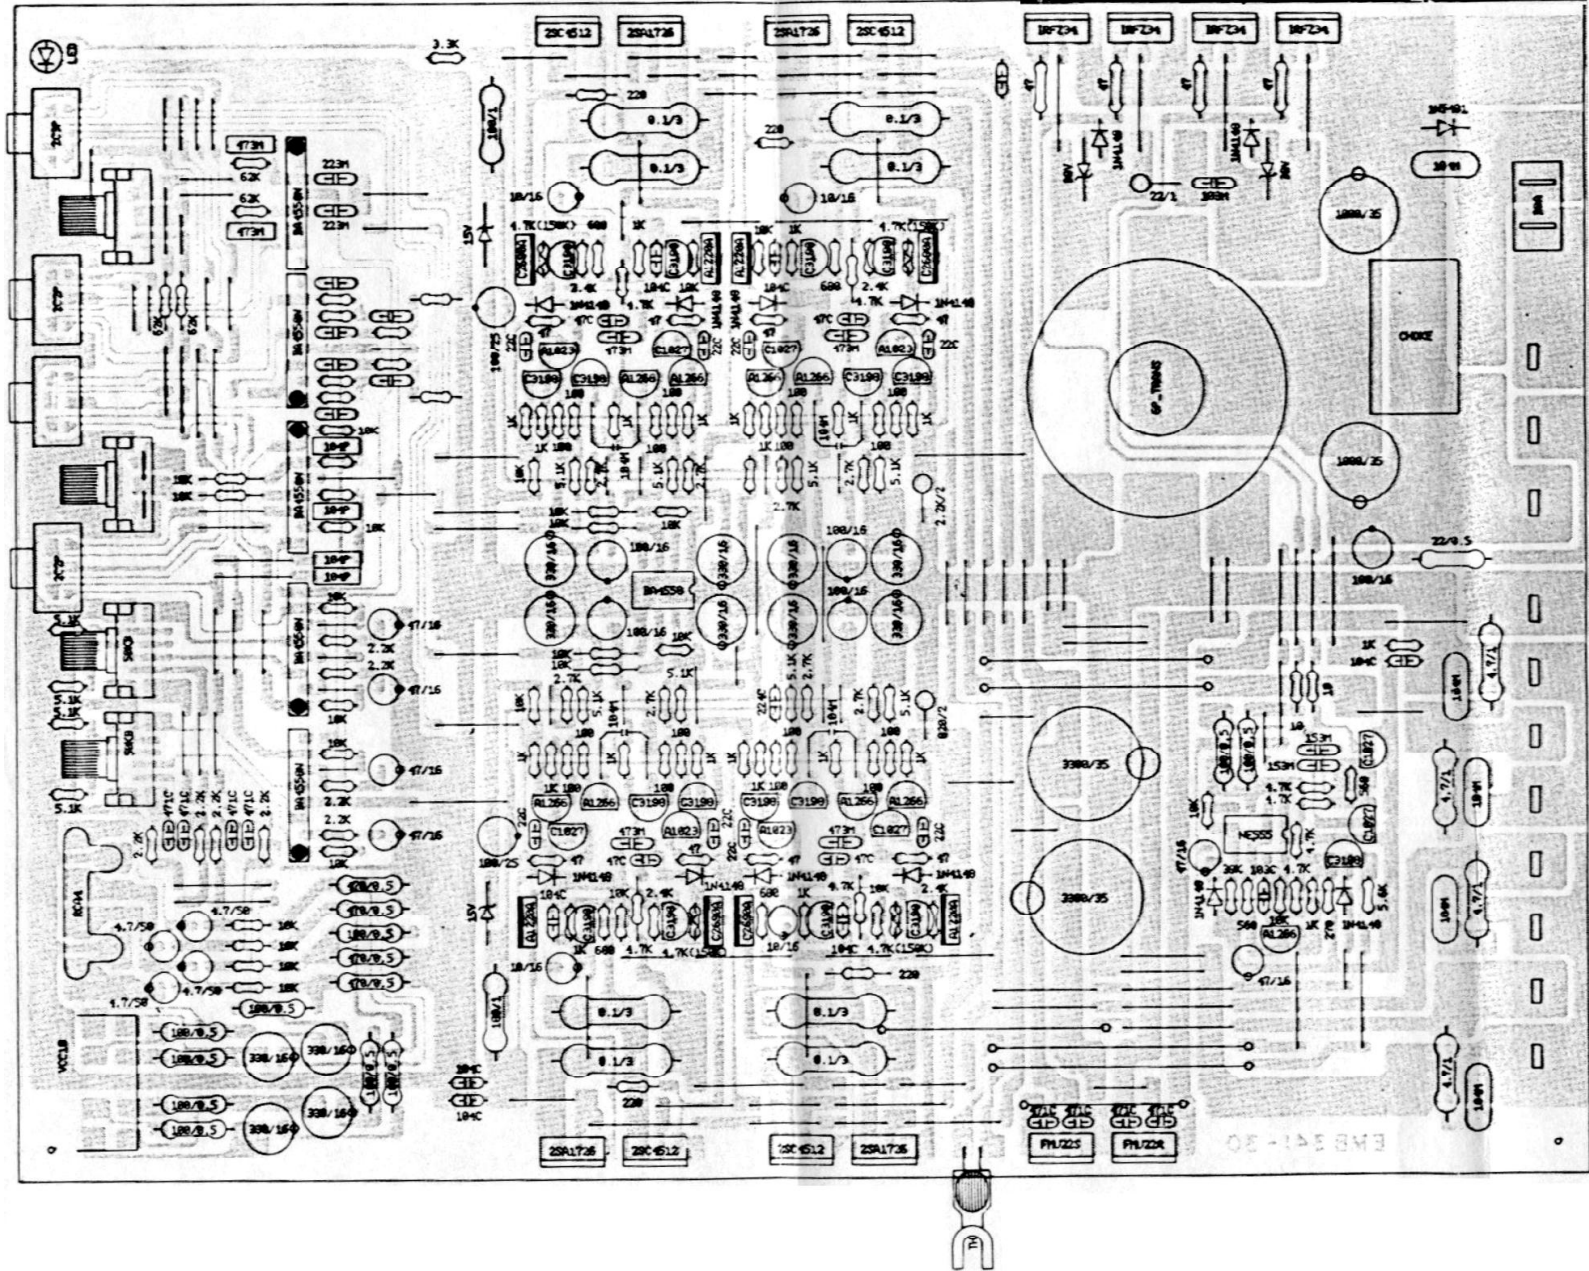

COMPONENTS LAYOUT DIAGRAM

BASIC : SA - 8934	DWG. NO : AAMA222-0
BUYER : SA - 8934	FILE NO : A - 10 - 7
DRAWING CHECK	CHECK APPROVAL
L. H. H	<i>[Signature]</i>

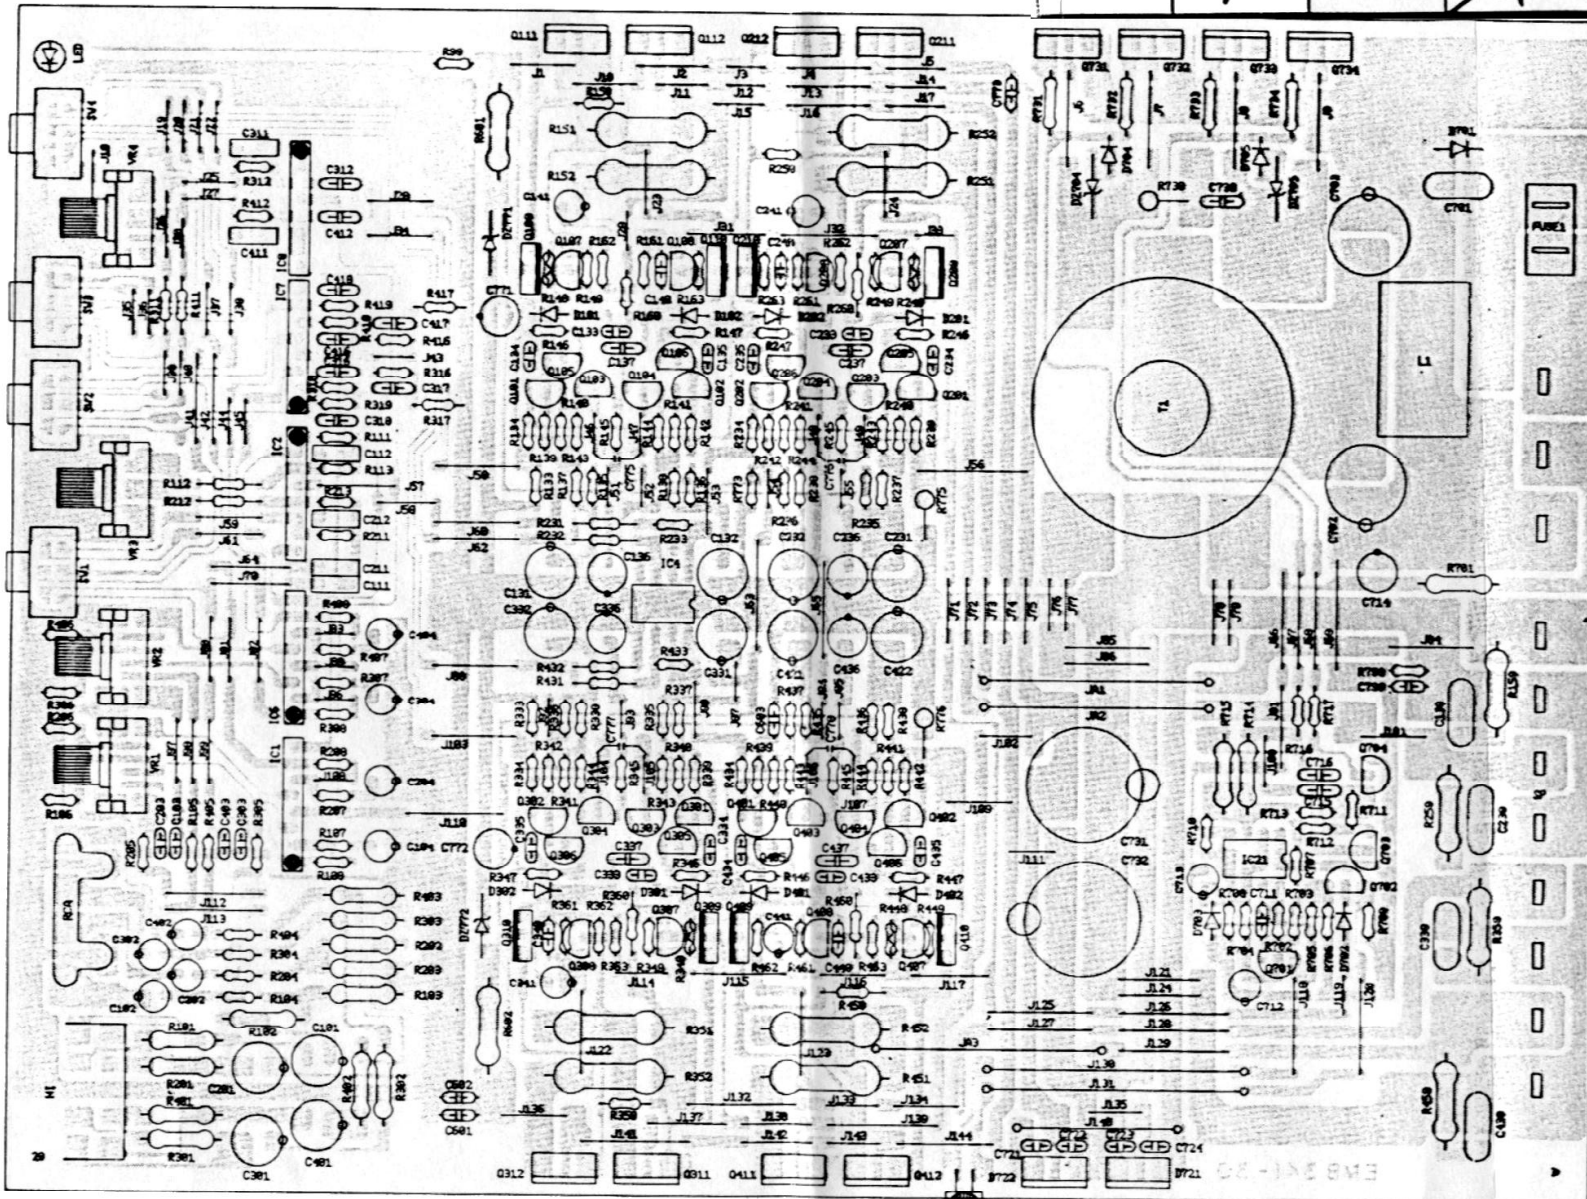

삼영전자공업(주)

AA41B89-01-214-04-1 / MAC THUNDER 4000

BASIC MODEL. : AA41B89-01 / SA-8934

목록

NO	자재코드	품목명	규격	단위	분포	소요량
1	SIAE-BA4558	(E. Q/OP AMP IC)	(BA 4558 DIP-8PIN)	EA		1.00
2	SIAE-BA4558N	(E. Q/OP AMP IC)	(BA 4558N SIP-8PIN)	EA		4.00
3	S1ZZ-KA555	(기타 I.C)	(KA555)	EA		1.00
4	SFPK-1RFZ34	(POWER N-CHANNEL FET)	(1RFZ 34)	EA		4.00
5	STSA-1023B	(H PNP TRANSISTOR)	(KTA 1023Y or KTA965)	EA		4.00
6	STSA-1266B	(H PNP TRANSISTOR)	(KTA1266Y OR 1015Y)	EA		9.00
7	STSA-2SA1726	(H PNP TRANSISTOR)	(2SA 1726)	EA		4.00
8	STSA-KSA1220A	(H PNP TRANSISTOR)	(KSA1220A-Y)	EA		4.00
9	STSC-1027B	(H NPN TRANSISTOR)	(KTC1027Y or KTC2235)	EA		6.00
10	STSC-2SC4512	(H NPN TRANSISTOR)	(2SC 4512)	EA		4.00
11	STSC-3198B	(H NPN TRANSISTOR)	(KTC3198(Y) OR 1815Y)	EA		17.00
12	STSC-KSC2690A	(H NPN TRANSISTOR)	(KSC2690A-Y)	EA		4.00
13	SD1B-SLR34MG	(BULK TYPE I. E. D)	(*3.1 GREEN SLR34MG)	EA		1.00
14	SDFB-FMU22R	(FAST RECOVERY DIODE)	(FMU-22R)	EA		1.00
15	SDFR-FMU22S	(FAST RECOVERY DIODE)	(FMU-22S)	EA		1.00
16	SDST-1N4148	(AXIAL52 SWITCH DIODE)	(1N4148 몸체3.5mm이하)	EA		12.00
17	SDZT-1D15B	(AXIAL52 ZENER DIODE)	(1W U7B 15V 1N4744)	EA		2.00
18	SDZT-1D30B	(AXIAL52 ZENER DIODE)	(1W UZB 30V 1N4754A)	EA		2.00
19	SDRB-1N5401	(BULK RECTIFY DIODE)	(STR TYPE 1N5401)	EA		1.00
20	EDWA-10-6337	(SOLDER WIRE 일반용)	(SN:PB 63:37 *1.0)	G		10.00
21	EDWA-20-6337	(SOLDER WIRE 일반용)	(SN:PB 63:37 *2.0)	G		12.00
22	EDRA-BA-6337	(SOLDER BAR 일반용)	(SN:PB 63:37 BAR)	G		18.00
23	RSSI-JSS2319	(SWITCH SLIDE LOCKING)	(JSS2319)	EA		1.00
24	ESSL-SSB032	(SWITCH SLIDE LOCKING)	(JSS2219 2C 2P 9m/m)	EA		2.00
25	PFON-A0000030	(FUSE AUTO NON-TIME)	(32V 30A)	EA		1.00
26	FHPB-EFH00201	(FUSE HOLDER BLADE(P))	(EFH-002-01 H0458)	EA		1.00
27	FTSB-PST01136	(SCREW TERMINAL. 11POS)	(PST-011-36)	EA		1.00
28	ICCR-ERC02103	(RING TYPE COIL)	(*21 *1-6)	EA		1.00
29	TTT2-EPT30010	(TOROID. TRANS(W/CORE))	(*36*1-6-6T*1-4-10T)	EA		1.00
30	CBUK-0707A104	(MPF 63V +/- 10 %)	(7.2x6.5x2.5 0.1uF)	EA		4.00
31	CCBK-BK03B471	(CER 50V +/- 10 %)	(BK *3 BULK 470pF)	EA		8.00
32	CCEK-CH04B220	(CER 50V +/- 10 %)	(CH *4 BULK 22pF)	EA		8.00
33	CCBK-CH05B470	(CER 50V +/- 10 %)	(CH *5 BULK 47pF)	EA		4.00
34	CCEZ-F-05B103	(CER 50V +80% - 20%)	(F *5 BULK 0.01uF)	EA		1.00
35	CCEZ-F06R104	(CER 50V +80% - 20%)	(F7 *6 RADIAL 0.1uF)	EA		7.00
36	CCEZ-F11R224	(CER 50V -80% - 20%)	(FZ *11 RADIAL 0.22uF)	EA		1.00
37	CECM-0511A100	(ELC 16V +/-20 %)	(5x11 +85 10uF)	EA		4.00
38	CECM-0511A101	(ELC 16V +/-20 %)	(5x11 +85 100uF)	EA		5.00
39	CECM-0511A470	(ELC 16V +/-20 %)	(5x11 +85 47uF)	EA		6.00
40	CECM-0812A331	(ELC 16V +/-20 %)	(8x11.5 +85 330uF)	EA		12.00
41	CECM-0611A101	(ELC 25V +/-20 %)	(6.3x11 +85 100uF)	EA		2.00
42	CECM-0511A4B7	(ELC 50V +/-20 %)	(5x11 +85 4.7uF)	EA		4.00
43	CERM-1325B102	(ELC 35V +/- 20 %)	(12.5x25 +105 1000uF)	EA		2.00
44	CERM-1824A332	(ELC 35V +/- 20 %)	(18x24 +85 3300uF)	EA		2.00
45	CMFJ-0611B103	(MYL 100V +/- 5 %)	(6.0x11.2 BULK 0.01uF)	EA		1.00
46	CMFJ-0711B153	(MYL 100V +/- 5 %)	(6.7x11.4 B 0.015uF)	EA		2.00
47	CMFJ-0712B223	(MYL 100V +/- 5 %)	(6.7x11.6 B 0.022uF)	EA		2.00
48	CMFJ-0912B473	(MYL 100V +/- 5 %)	(8.5x12.4 B 0.047uF)	EA		6.00
49	CMFJ-1013B104	(MYL 100V +/- 5 %)	(10x12.6 BULK 0.1uF)	EA		9.00
50	RVRM-SBR2035	(ROTARY MAIN VOLUME)	(V122(M) V20 50KB)	EA		2.00
51	RFEJ-AT52-100	(C. F RESISTOR 1/5W 5%)	(AXIAL 52mm 10 ohm)	EA		2.00

삼현전자공업(주)

AA41B89-01-214-04-1 / MAC THUNDER 4000

BASIC MODEL : AA41B89-01 / SA-8934

동년

NO	자재코드	품목명	규격	단위	분포	소요량
52	RFEJ-AT52-101	(C. F RESISTOR 1/5W 5%)	(AXIAL 52mm 100 ohm)	EA		16.00
53	RFEJ-AT52-102	(C. F RESISTOR 1/5W 5%)	(AXIAL 52mm 1K ohm)	EA		22.00
54	RFEJ-AT52-103	(C. F RESISTOR 1/5W 5%)	(AXIAL 52mm 10K ohm)	EA		24.00
55	RFEJ-AT52-183	(C. F RESISTOR 1/5W 5%)	(AXIAL 52mm 18K ohm)	EA		2.00
56	RFEJ-AT52-221	(C. F RESISTOR 1/5W 5%)	(AXIAL 52mm 220 ohm)	EA		4.00
57	RFEJ-AT52-222	(C. F RESISTOR 1/5W 5%)	(AXIAL 52mm 2.2K ohm)	EA		8.00
58	RFEJ-AT52-242	(C. F RESISTOR 1/5W 5%)	(AXIAL 52mm 2.4K ohm)	EA		4.00
59	RFEJ-AT52-271	(C. F RESISTOR 1/5W 5%)	(AXIAL 52mm 270 ohm)	EA		1.00
60	RFEJ-AT52-272	(C. F RESISTOR 1/5W 5%)	(AXIAL 52mm 2.7K ohm)	EA		8.00
61	RFEJ-AT52-332	(C. F RESISTOR 1/5W 5%)	(AXIAL 52mm 3.3K ohm)	EA		1.00
62	RFEJ-AT52-393	(C. F RESISTOR 1/5W 5%)	(AXIAL 52mm 39K ohm)	EA		1.00
63	RFEJ-AT52-470	(C. F RESISTOR 1/5W 5%)	(AXIAL 52mm 47 ohm)	EA		8.00
64	RFEJ-AT52-472	(C. F RESISTOR 1/5W 5%)	(AXIAL 52mm 4.7K ohm)	EA		12.00
65	RFEJ-AT52-512	(C. F RESISTOR 1/5W 5%)	(AXIAL 52mm 5.1K ohm)	EA		12.00
66	RFEJ-AT52-561	(C. F RESISTOR 1/5W 5%)	(AXIAL 52mm 560 ohm)	EA		2.00
67	RFEJ-AT52-562	(C. F RESISTOR 1/5W 5%)	(AXIAL 52mm 5.6K ohm)	EA		1.00
68	RFEJ-AT52-623	(C. F RESISTOR 1/5W 5%)	(AXIAL 52mm 62K ohm)	EA		4.00
69	RFEJ-AT52-681	(C. F RESISTOR 1/5W 5%)	(AXIAL 52mm 680 ohm)	EA		4.00
70	RFEJ-AT52-470	(C. F RESISTOR 1/4W 5%)	(AXIAL 52mm 47 ohm)	EA		4.00
71	RFGJ-AT52-101	(C. F RESISTOR 1/2W 5%)	(AXIAL 52mm 100 ohm)	EA		10.00
72	RFGJ-AT52-220	(C. F RESISTOR 1/2W 5%)	(AXIAL 52mm 22 ohm)	EA		1.00
73	RFGJ-AT52-471	(C. F RESISTOR 1/2W 5%)	(AXIAL 52mm 470ohm)	EA		4.00
74	RMHJ-SB-101	(MTL RESISTOR 1W 5%)	(STR BULK 100 ohm)	EA		2.00
75	RMHJ-SB-220	(MTL RESISTOR 1W 5%)	(STR BULK 22ohm)	EA		1.00
76	RMHJ-SB-4R7	(MTL RESISTOR 1W 5%)	(STR BULK 4.7 ohm)	EA		4.00
77	RMHJ-SB-222	(MTL RESISTOR 2W 5%)	(STR BULK 2.2K ohm)	EA		1.00
78	RMHJ-SB-821	(MTL RESISTOR 2W 5%)	(STR BULK 820ohm)	EA		1.00
79	RTNK-ETF-11	(THERMISTOR NTC 10 %)	(150 K NON LUG)	EA		4.00
80	RTNK-ETF-12	(THERMISTOR NTC 10 %)	(150K ohm 더긋형)	EA		1.00
81	RWJJ-FB-R10M	(WIRE WOUND 3WATT 5%)	(FORMING-TYPE 0.1 ohm)	EA		8.00
82	JJR4-ERJ04001	(RCA JACK 4 POSITION)	(ERJ-040-01 세움BK/BK)	EA		1.00
83	PWF1-FMR34130	(MAIN PCB FR-1 1)	(EMB-341-30)	EA		1.00
84	HCSF-HHC10006	(10P PCB SOCKET OUT)	(HHC-100-06)	EA		1.00
85	HCSJ-35318-10	(6P PCB SOCKET OUT)	(35318-10 SET "A"TYPE)			1.00
86	WLPX-R7A052	(자삽용 COPPER WIRE)	(*0.7 AXIAL TYPE 52mm)	EA		145.00
87	WLPZ-10B-035	(일반용 COPPER WIRE)	(BULK *1.0 35m/m)	EA		3.00
88	WLPZ-10B-040	(일반용 COPPER WIRE)	(BULK *1.0 40m/m)	EA		2.00
89	ZISZ-SJR-2500	(SILICONE PAD)	(25m/m x10m/m 1000L)	EA		26.00
90	ZHNN-HEXANE	(HEXANE)	(HEXANE)	G		1.00
91	ZFFN-1320	(FLUX ROSIN)	(1320)	G		1.00
92	ZRRN-1T310	(THINNER)	(1T310)	G		1.00
93	ZSSN-6111	(NON UL SILICONE GREAS)	(YG6111)	G		0.50
94	ZDMU-MAXBOND	(MAXBOND 공업용)	(NO.1603HFR-HS)	G		5.00

< TOTAL > 94 개 PART