



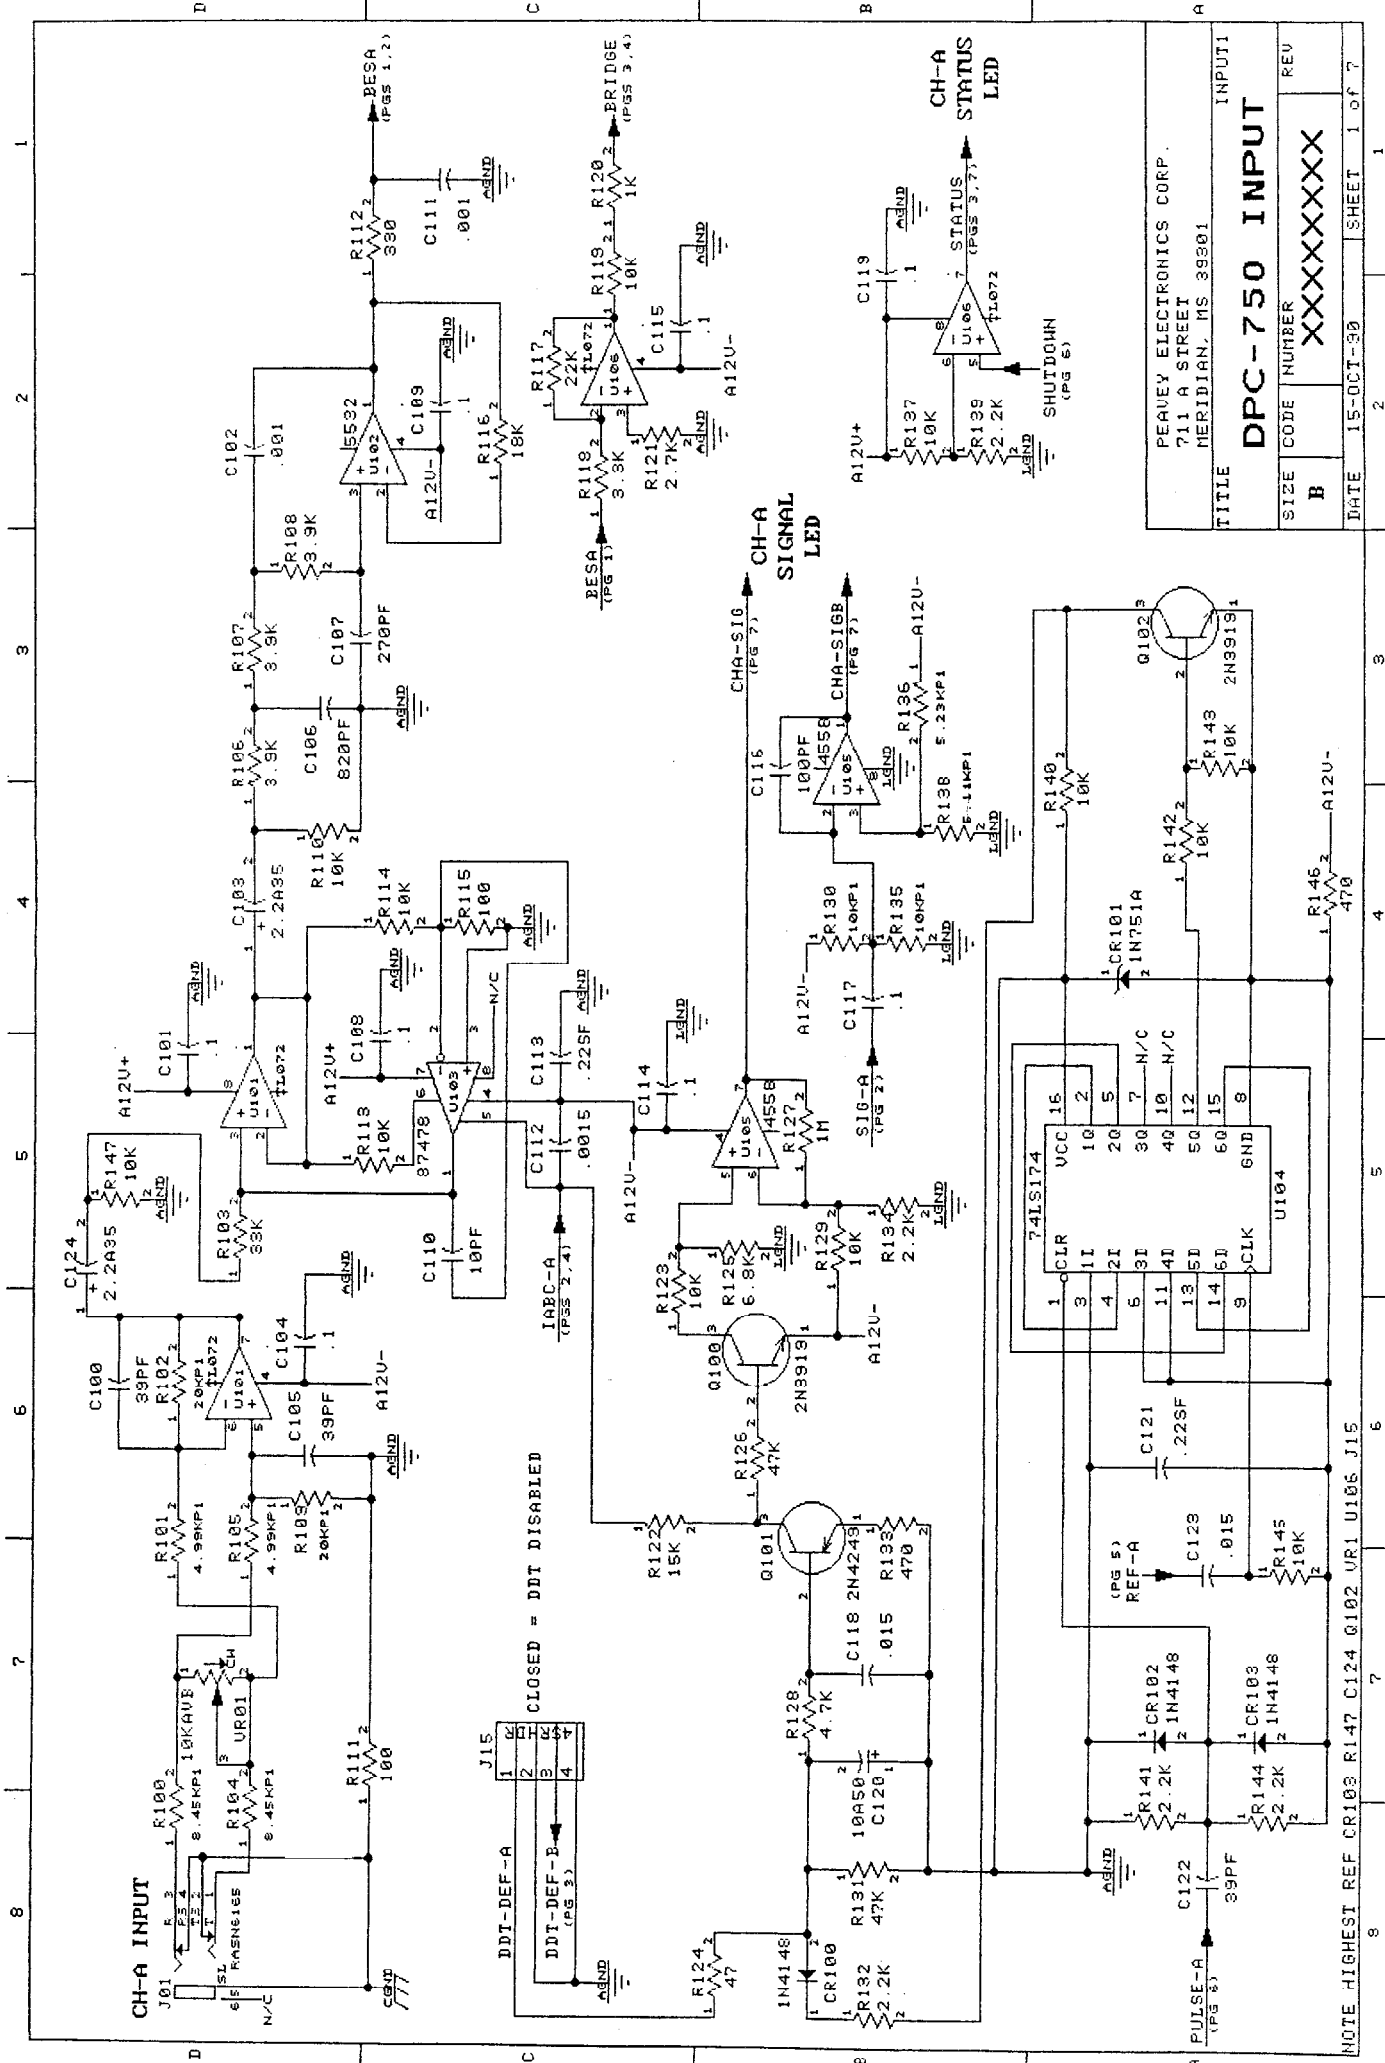

CH-B INPUT

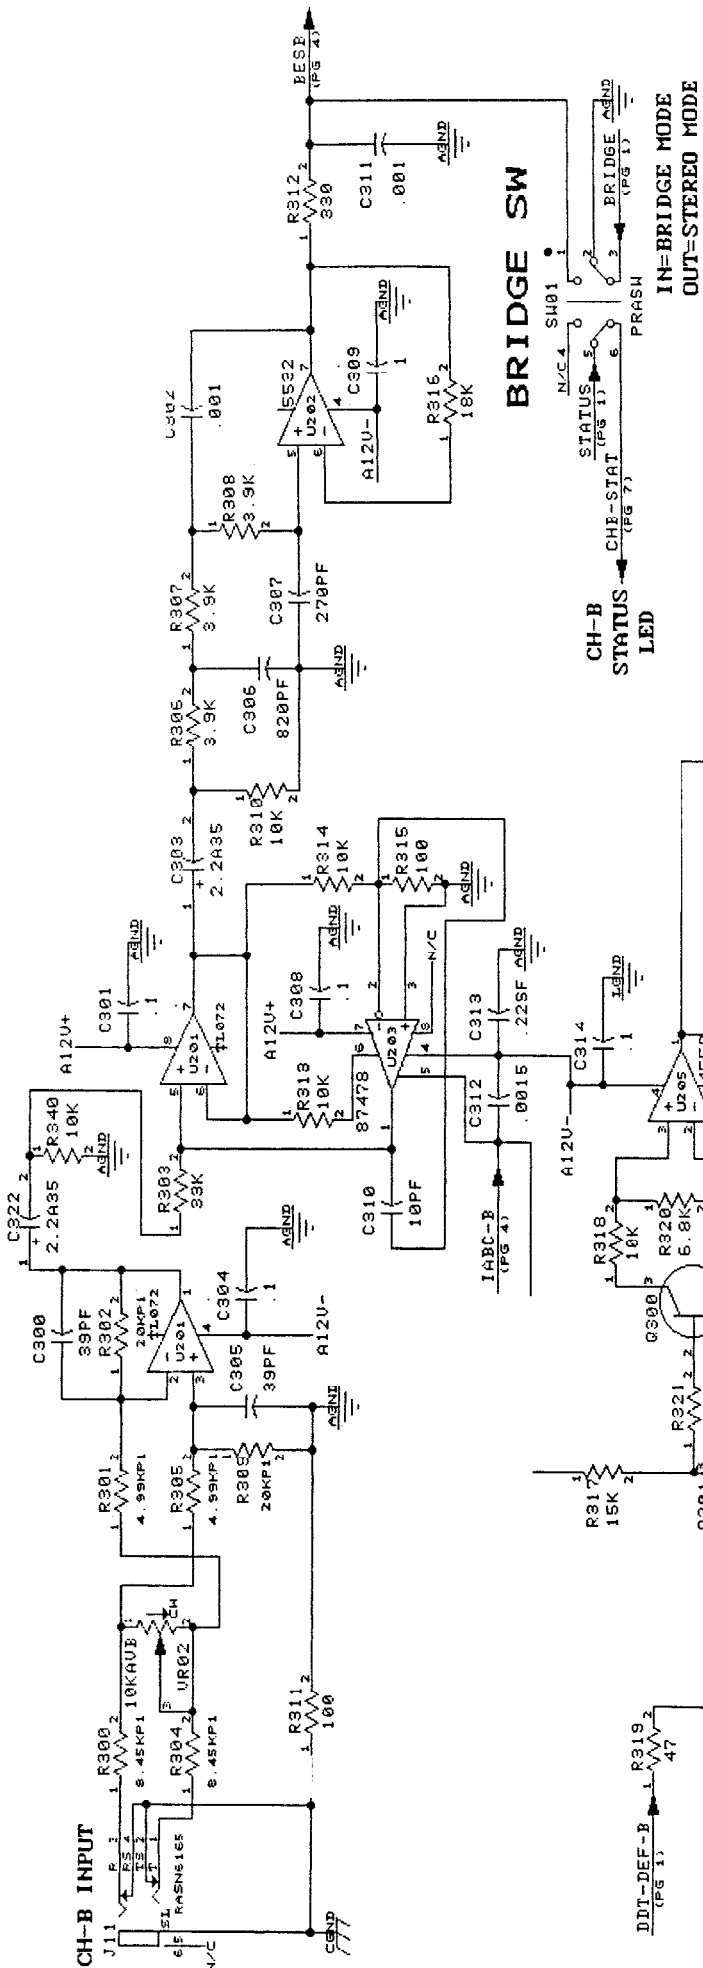

BRIDGE SW

IN-BRIDGE MODE
OUT-STEREO MODE



CH-B STATUS LED



CH-B SIGNAL LED


PEAVEY ELECTRONICS CORP.
711 A STREET
MERIDIAN, MS 39301

DPC-750 INPUT

SIZE	CODE	NUMBER	REV
B		XXXXXXX	


DATE 15-OCT-90 SHEET 3 of 7

NOTE HIGHEST REF CR303 R339 C321 Q302 UR2 U205 J11 SW1

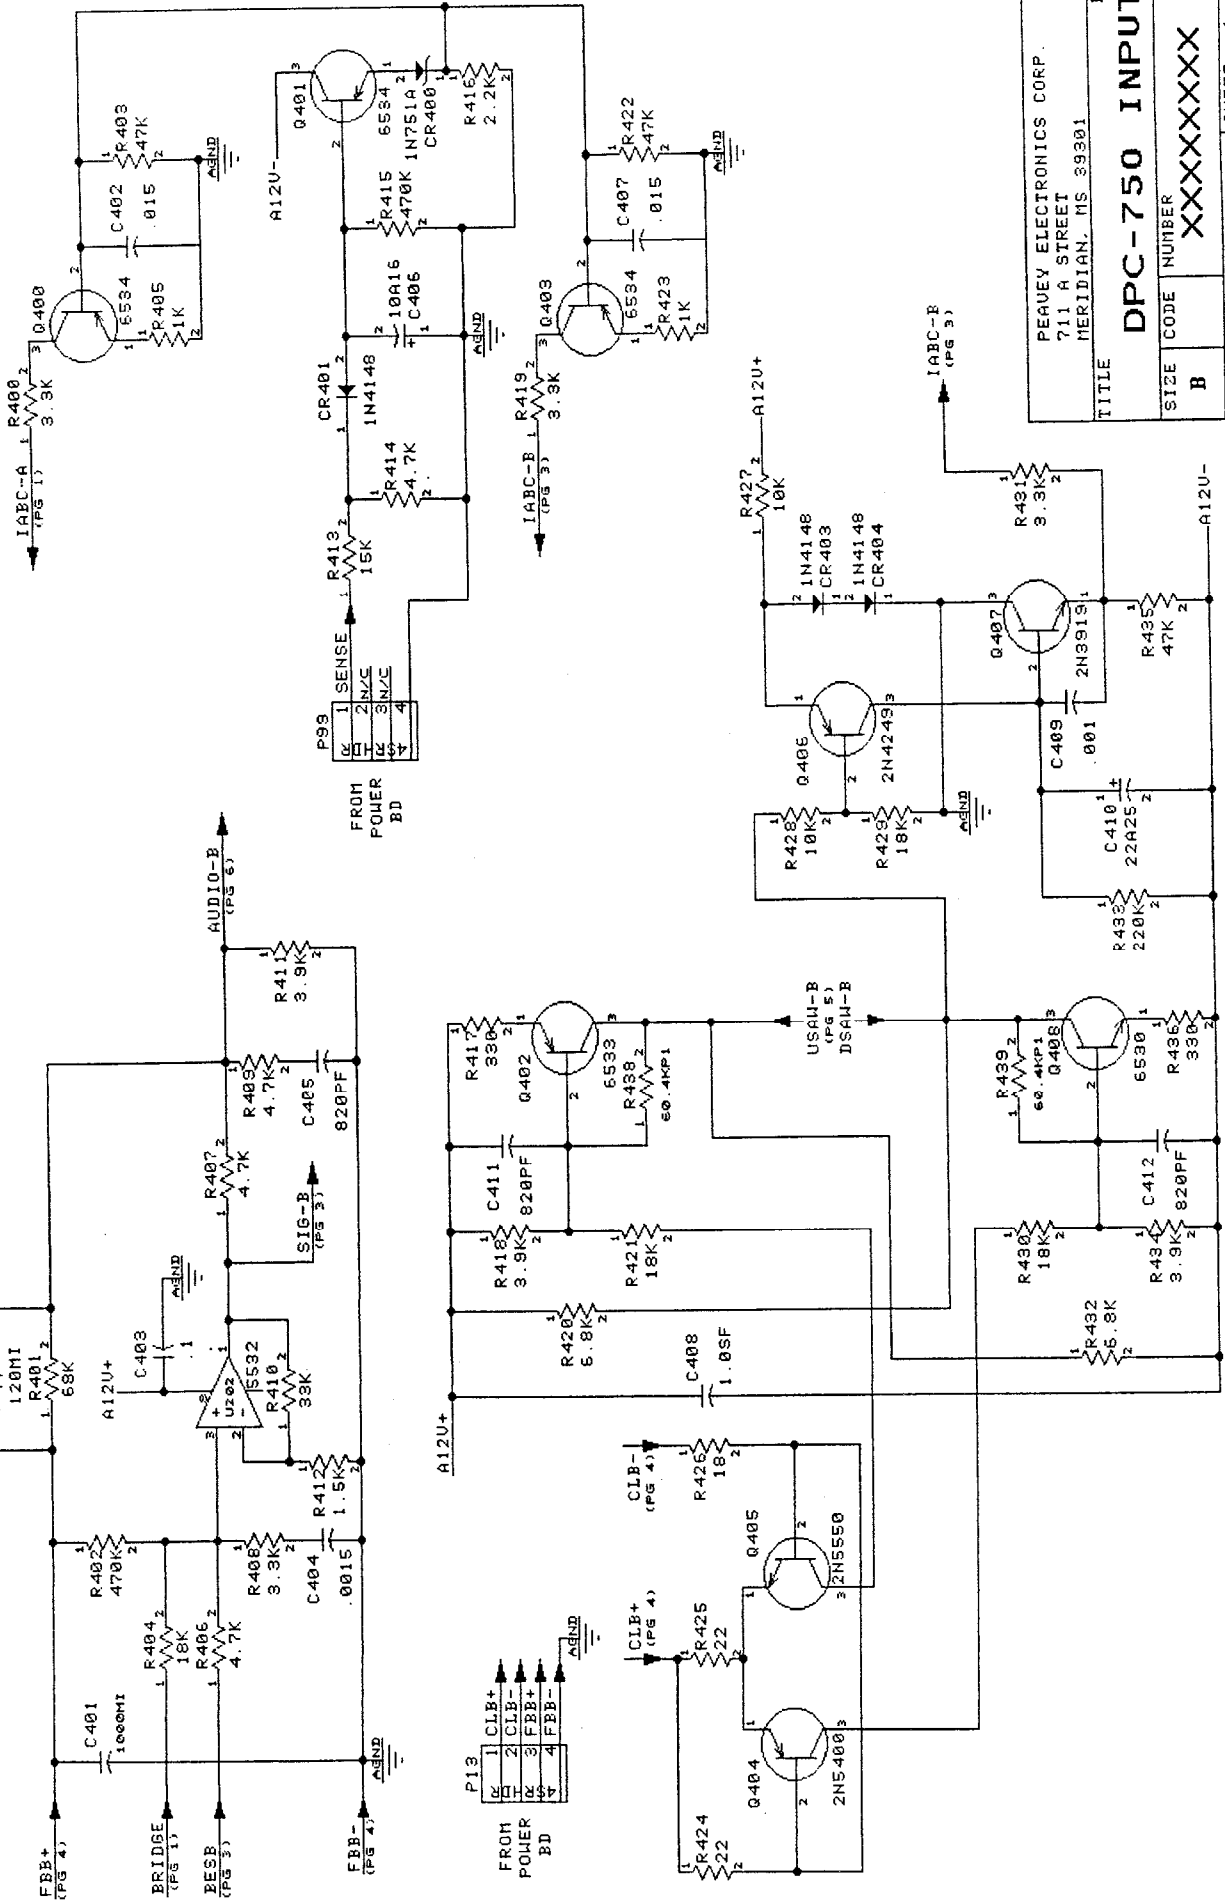

PEAVEY ELECTRONICS CORP. 711 A STREET MERIDIAN, MS 39301		TITLE DPC-750 INPUT		INPUT 4	
SIZE	CODE	NUMBER	REV		
B		XXXXXXX			
DATE		13-FEB-91		SHEET 4 of 7	


NOTE HIGHEST REF CR404 R437 C412 0408 U202

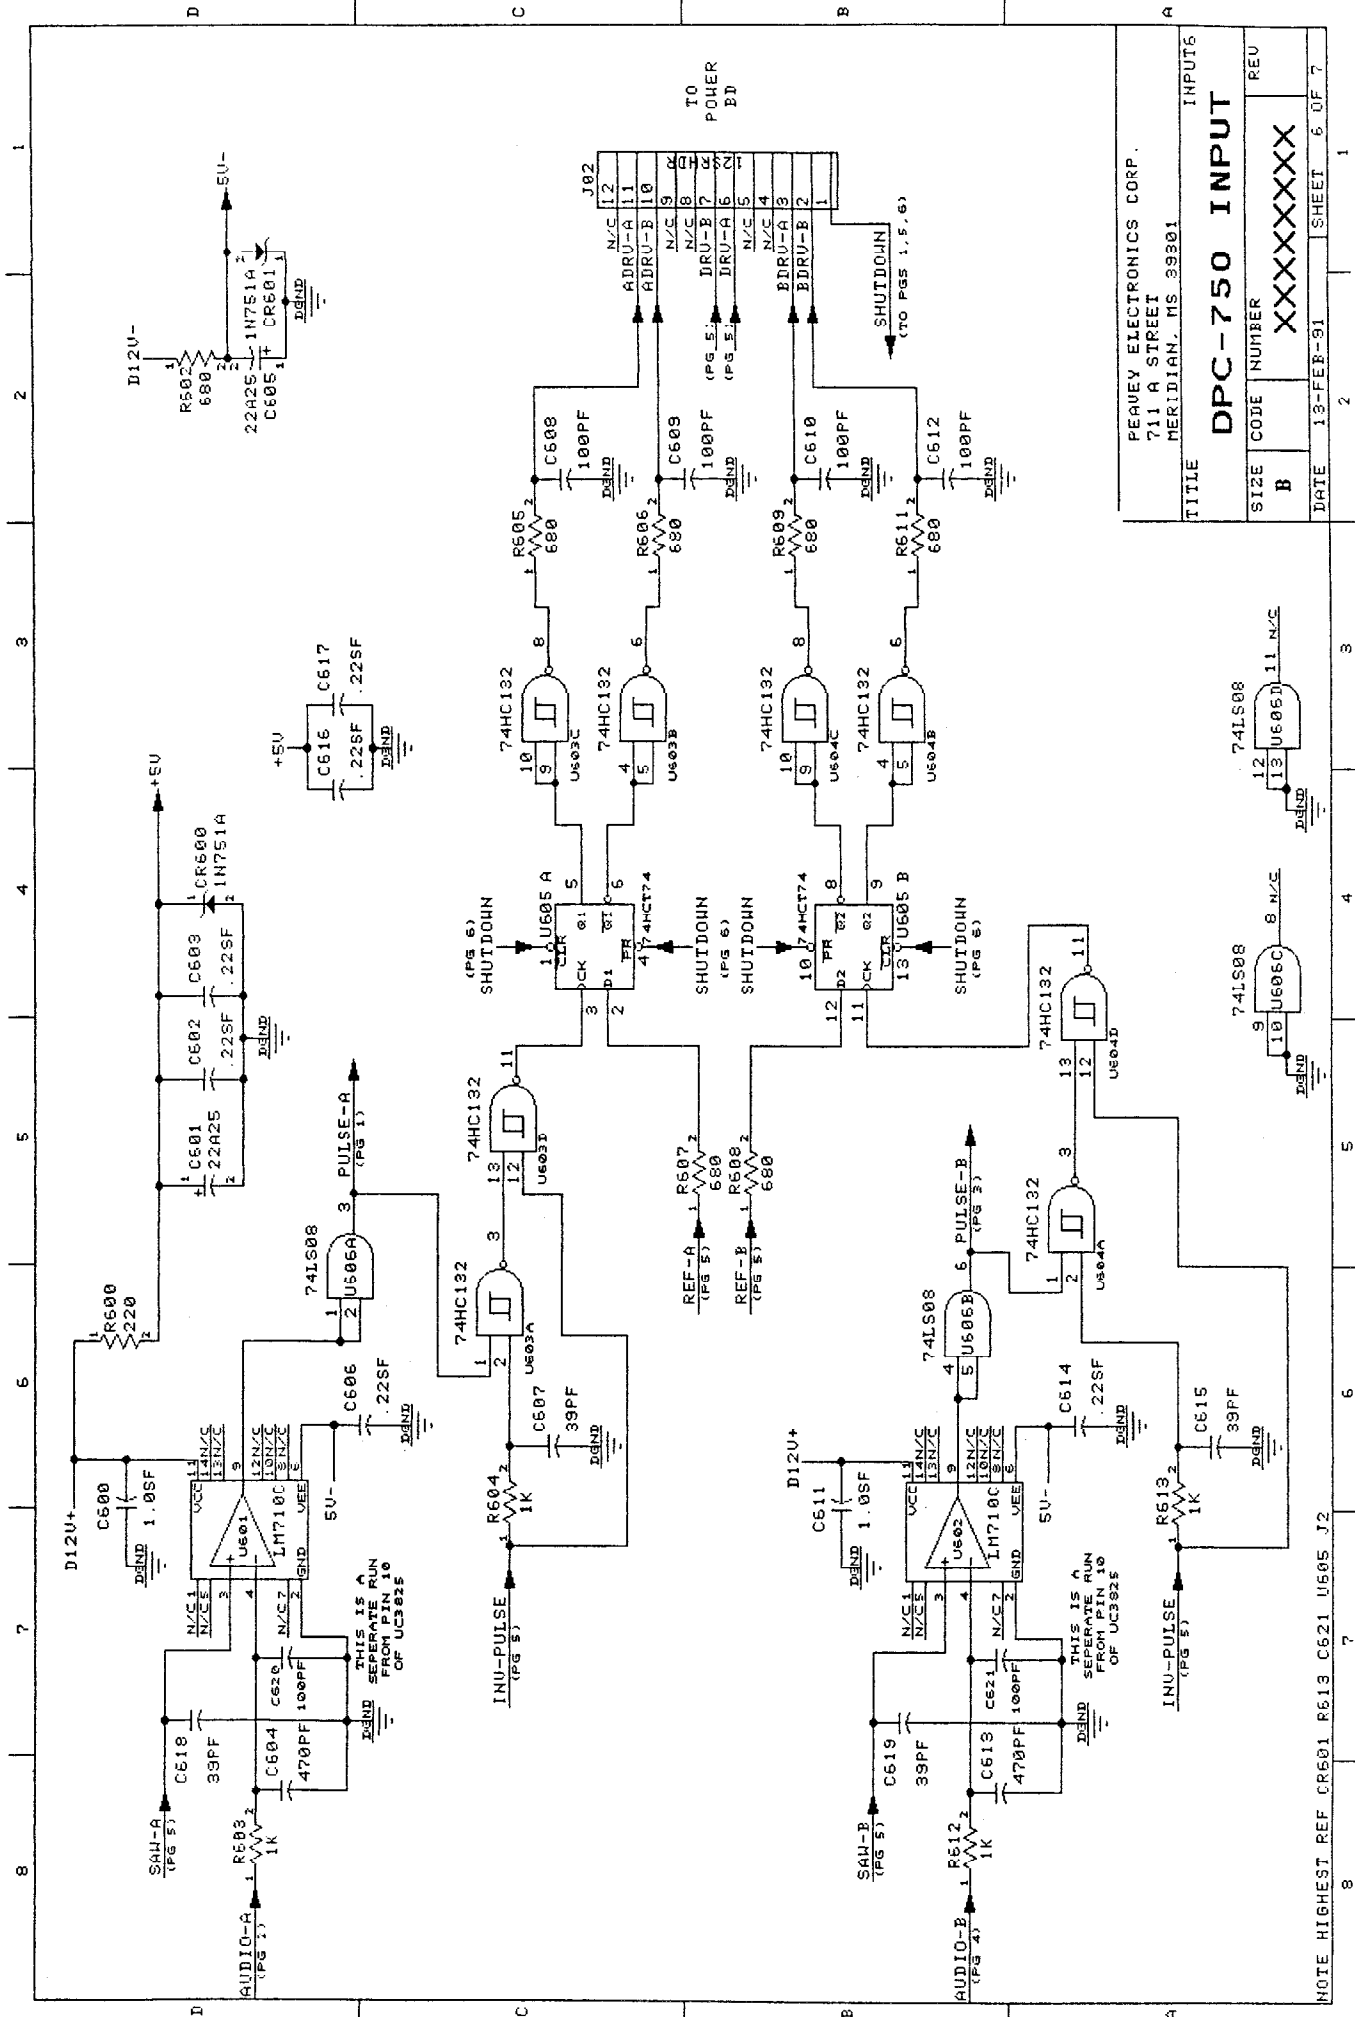

PEAVEY ELECTRONICS CORP.
711 A STREET
MERIDIAN, MS 39301

TITLE			
DPC-750 INPUT			
INPUTS			
SIZE	CODE	NUMBER	REV
B		XXXXXXXX	
DATE		13-FEB-91	SHEET 6 OF 7

NOTE HIGHEST REF C601 R613 C621 U605 J2

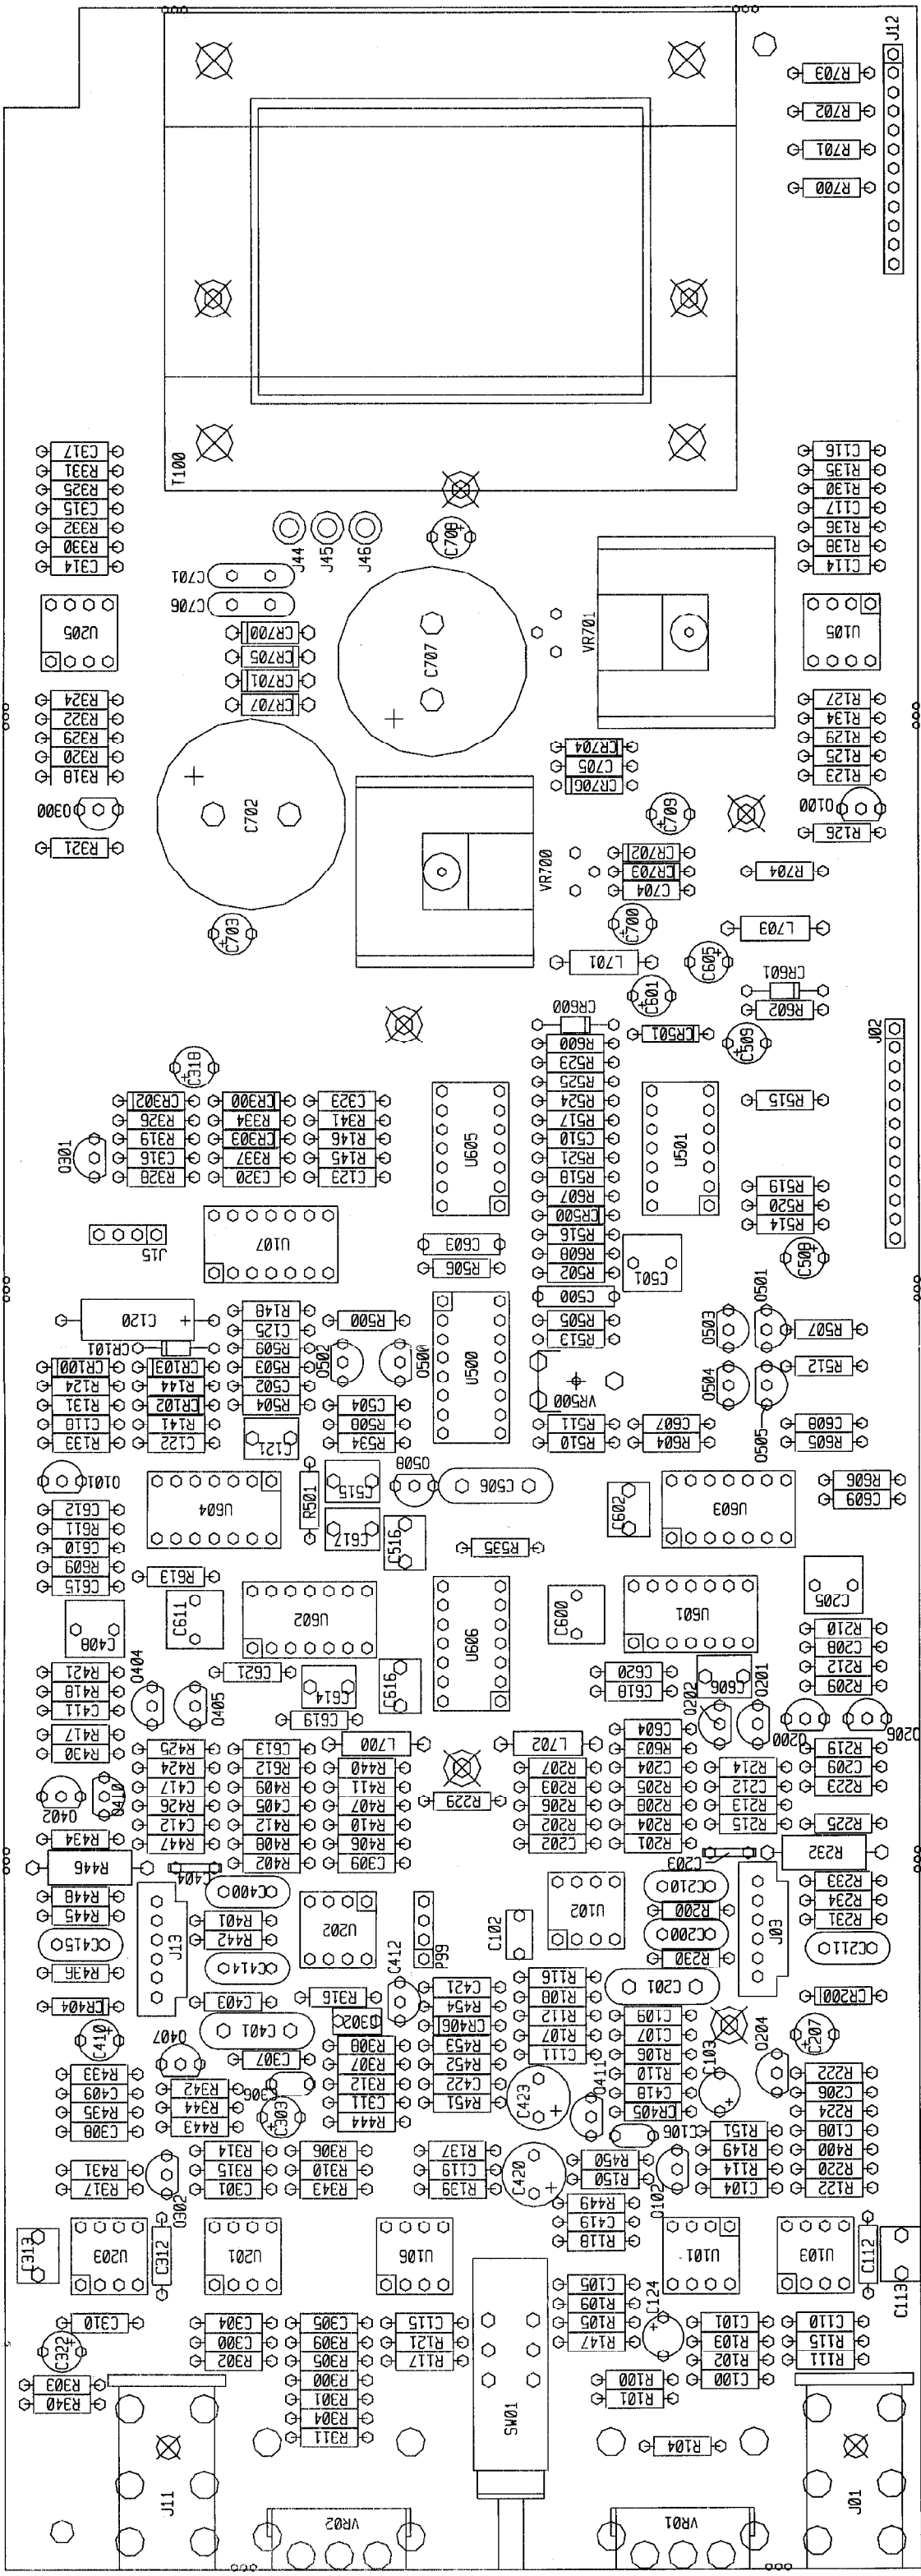

DPC 750 Input

ASSEMBLY LEVEL NUMBER: 99097653									
QTY.	NAME	VALUE	PART NUMBER	DESCRIPTION AND DEVICE DESIGNATIONS	*****	QTY.	NAME	VALUE	PART NUMBER
1	39PF	39PF	70340052	39PF-----50VDC-T/C-T&R	*****	1	39PF	39PF	70340052
1	.1	.1	70340100	.1MF---80-208-50VDC-AXL-T&R	*****	1	.1	.1	70340100
1	.0047M	.0047M	70330116	.0047 MFD 50VDC 5% MY T&A	*****	1	.0047M	.0047M	70330116
1	2.2R50	2.2R50	70320180	2.2MF---208-50VDC-EL-T&A	*****	1	2.2R50	2.2R50	70320180
1	.1	.1	70340100	.1MF---80-208-50VDC-AXL-T&R	*****	1	.1	.1	70340100
1	39PF	39PF	70340052	39PF-----50VDC-T/C-T&R	*****	1	39PF	39PF	70340052
1	.01M	.01M	70320077	.01 UF MYLAR 5% 100V	*****	1	.01M	.01M	70320077
1	270PF	270PF	70340057	270PF---108-50VDC-T/C-T&R	*****	1	270PF	270PF	70340057
2	.1	.1	70340100	.1MF---80-208-50VDC-AXL-T&R	*****	2	.1	.1	70340100
1	10PF	10PF	70340050	10PF---50VDC-AXL-T&R	*****	1	10PF	10PF	70340050
1	.001	.001	70340000	.001MF---108-50VDC-MON-T&R	*****	1	.001	.001	70340000
1	.0015	.0015	70340002	.0015MF---108-50VDC-T/C-T&R	*****	1	.0015	.0015	70340002
1	.22SF2	.22SF2	70330114	0.22 M ² 5% 100V STCK FILM T&A	*****	1	.22SF2	.22SF2	70330114
2	.1	.1	70340100	.1MF---80-208-50VDC-AXL-T&R	*****	2	.1	.1	70340100
1	100PF	100PF	70340054	100PF---108-50VDC-T/C-T&R	*****	1	100PF	100PF	70340054
1	.1	.1	70340100	.1MF---80-208-50VDC-AXL-T&R	*****	1	.1	.1	70340100
1	.015	.015	70340010	.015MF---108-50VDC-T/C-T&R	*****	1	.015	.015	70340010
1	.1	.1	70340100	.1MF---80-208-50VDC-AXL-T&R	*****	1	.1	.1	70340100
1	10A50	10A50	70320112	10MFD 50V T&R	*****	1	10A50	10A50	70320112
1	.22SF2	.22SF2	70330114	0.22 MF 5% 100V STCK FILM T&A	*****	1	.22SF2	.22SF2	70330114
1	180PF	180PF	70340056	180PF---108-50VDC-T/C-T&R	*****	1	180PF	180PF	70340056
1	.015	.015	70340010	.015MF---108-50VDC-AXL-T&R	*****	1	.015	.015	70340010
1	.1	.1	70340100	.1MF---80-208-50VDC-AXL-T&R	*****	1	.1	.1	70340100
1	.015	.015	70340010	.015MF---108-50VDC-T/C-T&R	*****	1	.015	.015	70340010
1	.1	.1	70340100	.1MF---80-208-50VDC-AXL-T&R	*****	1	.1	.1	70340100
1	10A50	10A50	70320112	10MFD 50V T&R	*****	1	10A50	10A50	70320112
1	.22SF2	.22SF2	70330114	0.22 MF 5% 100V STCK FILM T&A	*****	1	.22SF2	.22SF2	70330114
1	180PF	180PF	70340056	180PF---108-50VDC-T/C-T&R	*****	1	180PF	180PF	70340056
1	.015	.015	70340010	.015MF---108-50VDC-AXL-T&R	*****	1	.015	.015	70340010
1	.1	.1	70340100	.1MF---80-208-50VDC-AXL-T&R	*****	1	.1	.1	70340100
1	.015	.015	70340010	.015MF---108-50VDC-T/C-T&R	*****	1	.015	.015	70340010
1	.1	.1	70340100	.1MF---80-208-50VDC-AXL-T&R	*****	1	.1	.1	70340100
1	10A50	10A50	70320112	10MFD 50V T&R	*****	1	10A50	10A50	70320112
1	.22SF2	.22SF2	70330114	0.22 MF 5% 100V STCK FILM T&A	*****	1	.22SF2	.22SF2	70330114
1	180PF	180PF	70340056	180PF---108-50VDC-T/C-T&R	*****	1	180PF	180PF	70340056
1	.015	.015	70340010	.015MF---108-50VDC-AXL-T&R	*****	1	.015	.015	70340010
1	.1	.1	70340100	.1MF---80-208-50VDC-AXL-T&R	*****	1	.1	.1	70340100
1	.015	.015	70340010	.015MF---108-50VDC-T/C-T&R	*****	1	.015	.015	70340010
1	.1	.1	70340100	.1MF---80-208-5					

1	3.3K	3.3K	70240022	3.3K-1/4W-5%-CF-T&R	R210	1	3.3K	3.3K	70240022	3.3K-1/4W-5%-CF-T&R	R400	1	100K	100K	70240034	100K-1/4W-5%-CF-T&R	R521
1	18K	18K	70240028	18K-1/4W-5%-CF-T&R	R212	1	82K	82K	70240033	82K-1/4W-5%-CF-T&R	R401	1	2.2K	2.2K	70240020	2.2K-1/4W-5%-CF-T&R	R523
3	22	22	70240007	22-1/4W-5%-CF-T&R	R213, R214, R215	1	680K	680K	70240065	680K-1/4W-5%-CF-T&R	R402	3	3.3K	3.3K	70240022	3.3K-1/4W-5%-CF-T&R	R524, R525, R534
1	18K	18K	70240028	18K-1/4W-5%-CF-T&R	R219	2	4.7K	4.7K	70240023	4.7K-1/4W-5%-CF-T&R	R406, R407	1	10K	10K	70240025	10K-1/4W-5%-CF-T&R	R535
1	3.3K	3.3K	70240022	3.3K-1/4W-5%-CF-T&R	R220	1	3.3K	3.3K	70240022	3.3K-1/4W-5%-CF-T&R	R408	1	220	220	70240058	220-1/4W-5%-CF-T&R	R600
1	220K	220K	70240036	220K-1/4W-5%-CF-T&R	R222	1	4.7K	4.7K	70240023	4.7K-1/4W-5%-CF-T&R	R409	1	680	680	70240016	680-1/4W-5%-CF-T&R	R602
1	3.3K	3.3K	70240022	3.3K-1/4W-5%-CF-T&R	R223	1	33K	33K	70240030	33K-1/4W-5%-CF-T&R	R410	2	1K	1K	70240017	1K-1/4W-5%-CF-T&R	R603, R604
1	47K	47K	70240031	47K-1/4W-5%-CF-T&R	R224	1	3.9K	3.9K	70241093	3.9K-1/4W-5%-CF-AXL	R411	2	560	560	70240050	560-1/4W-5%-CF-T&R	R605, R606
1	22	22	70240007	22-1/4W-5%-CF-T&R	R225	1	1.5K	1.5K	70240018	1.5K-1/4W-5%-CF-T&R	R412	2	680	680	70240016	680-1/4W-5%-CF-T&R	R607, R608
1	220K	220K	70240036	220K-1/4W-5%-CF-T&R	R229	1	22	22	70240007	22-1/4W-5%-CF-T&R	R417	2	560	560	70240050	560-1/4W-5%-CF-T&R	R609, R611
1	68K	68K	70240032	68K-1/4W-5%-CF-T&R	R230	1	3.3K	3.3K	70240022	3.3K-1/4W-5%-CF-T&R	R418	6	1K	1K	70240017	1K-1/4W-5%-CF-T&R	R612, R613, R700, R701, R702, R703
1	10K	10K	70240025	10K-1/4W-5%-CF-T&R	R231	1	18K	18K	70240028	18K-1/4W-5%-CF-T&R	R421	1	22	22	70240007	22-1/4W-5%-CF-T&R	R704
1	10KW1	10KW1	70210018	10K-1W-5%-MO-T&R	R232	3	22	22	70240007	22-1/4W-5%-CF-T&R	R424, R425, R426	3	187SOWD	70900924	70900924	SPACER, .187 R.(#4),.187 SWAGE ALUM.	SO100, SO101, SO102
1	3.3K	3.3K	70240022	3.3K-1/4W-5%-CF-T&R	R233	1	18K	18K	70240028	18K-1/4W-5%-CF-T&R	R430	1	187SOWB	70900935	70900935	SPACER, .187 (#4),.187 SWAGE BRASS	SO103
1	1K	1K	70240017	1K-1/4W-5%-CF-T&R	R234	1	3.3K	3.3K	70240022	3.3K-1/4W-5%-CF-T&R	R431	20	187SOWD	70900924	70900924	SPACER, .187 R.(#4),.187 SWAGE ALUM.	SO104, SO105, SO106, SO107, SO108, SO109, SO110, SO111, SO200, SO201, SO202, SO203, SO204, SO205, SO206, SO207, SO208, SO209, SO210, SO211
1	8.45KP1	8.45KP1	70241010	8.45K-1/4W-1%-MF-T&R	R300	1	220K	220K	70240036	220K-1/4W-5%-CF-T&R	R433	1	4560	4560	70414560	4560 DUAL OP AMP IC	T100
1	4.99KP1	4.99KP1	70241060	4.99K-1/4W-1%-MF-T&R	R301	1	3.3K	3.3K	70240022	3.3K-1/4W-5%-CF-T&R	R434	1	5532	5532	70405532	NE5532FE DUAL LO-NOISE	U101
1	30.1KP1	30.1KP1	70241031	30.1K-1/4W-1%-MF-T&R	R302	1	47K	47K	70240031	47K-1/4W-5%-CF-T&R	R435	1	13080	13080	70413080	LM3080N CUSTOM SELECTED	U102
1	33K	33K	70240030	33K-1/4W-5%-CF-T&R	R303	1	22	22	70240007	22-1/4W-5%-CF-T&R	R436	1	4560	4560	70414560	4560 DUAL OP AMP IC	U105
1	8.45KP1	8.45KP1	70241010	8.45K-1/4W-1%-MF-T&R	R304	1	220K	220K	70240036	220K-1/4W-5%-CF-T&R	R440	1	5532	5532	70405532	NE5532FE DUAL LO-NOISE	U106
1	4.99KP1	4.99KP1	70241050	4.99K-1/4W-1%-MF-T&R	R305	1	68K	68K	70240032	68K-1/4W-5%-CF-T&R	R442	1	13080	13080	70413080	LM3080N CUSTOM SELECTED	U107
1	2.7K	2.7K	70240021	2.7K-1/4W-5%-CF-T&R	R306	1	3.3K	3.3K	70240022	3.3K-1/4W-5%-CF-T&R	R443	1	4558	4558	70404558	IC RC-4558, P DUAL BI-PKG 10	U201
2	5.62KP1	5.62KP1	70241098	5.62K-1/4W-1%-MF-T&R	R307, R308	2	10K	10K	70240025	10K-1/4W-5%-CF-T&R	R444, R445	1	4560	4560	70414560	4560 DUAL OP AMP IC	U202
1	30.1KP1	30.1KP1	70241031	30.1K-1/4W-1%-MF-T&R	R309	1	10KW1	10KW1	70210018	10K-1W-5%-MO-T&R	R446	1	HC774	74HC774	70430074	74HCT74 CMOS DUAL FLIP FLOP	U203
1	10K	10K	70240025	10K-1/4W-5%-CF-T&R	R310	1	3.3K	3.3K	70240022	3.3K-1/4W-5%-CF-T&R	R447	1	4560	4560	70414560	4560 DUAL OP AMP IC	U205
1	100	100	70240010	100-1/4W-5%-CF-T&R	R311	1	1K	1K	70240017	1K-1/4W-5%-CF-T&R	R448	1	5532	5532	70405532	NE5532FE DUAL LO-NOISE	U500
1	330	330	70240014	330-1/4W-5%-CF-T&R	R312	1	47K	47K	70240031	47K-1/4W-5%-CF-T&R	R449	1	13080	13080	70413080	LM3080N CUSTOM SELECTED	U501
1	22K	22K	70240029	22K-1/4W-5%-CF-T&R	R313	1	33K	33K	70240030	33K-1/4W-5%-CF-T&R	R450	1	4558	4558	70404558	IC RC-4558, P DUAL BI-PKG 10	U601, U602
1	100	100	70240010	100-1/4W-5%-CF-T&R	R314	1	220K	220K	70240036	220K-1/4W-5%-CF-T&R	R451	1	ML4825	ML4825	70404825	LM4825-PWM-IC	U603, U604
1	18K	18K	70240028	18K-1/4W-5%-CF-T&R	R315	1	47K	47K	70240031	47K-1/4W-5%-CF-T&R	R452	1	3086	70423086	70423086	LM3086 OR CA3086 TRANSISTOR ARRAY	U605
1	15K	15K	70240027	15K-1/4W-5%-CF-T&R	R316	1	33K	33K	70240030	33K-1/4W-5%-CF-T&R	R453	2	LM710C	LM710C	70420710	VOLTAJE COMPARATOR	U606
1	10K	10K	70240025	10K-1/4W-5%-CF-T&R	R317	1	220K	220K	70240036	220K-1/4W-5%-CF-T&R	R454	2	74HC132	70400132	70400132	74HC132 QUAD 2-INPUT NAND	U607
1	47	47	70240008	47-1/4W-5%-CF-T&R	R318	1	47	47	70240008	47-1/4W-5%-CF-T&R	R455	1	74HC774	74HC774	70430074	74HCT74 CMOS DUAL FLIP FLOP	U608
1	6.8K	6.8K	70240024	6.8K-1/4W-5%-CF-T&R	R319	1	270	270	70240013	270-1/4W-5%-CF-T&R	R456	1	74LS08	70420108	70420108	DUAL INPUT AND GATE	U609
1	47K	47K	70240031	47K-1/4W-5%-CF-T&R	R320	1	3.9K	3.9K	70241093	3.9K-1/4W-5%-CF-AXL	R457	2	10KAVB	71190528	71190528	10K 20% AUD MIN VPC W/BACKET	U609, VR02
1	1M	1M	70240039	1M-1/4W-5%-CF-T&R	R321	1	2.2K	2.2K	70240020	2.2K-1/4W-5%-CF-T&R	R458	1	10KTRIM	10KTRIM	71190009	10K LIN HOR. PC MNT TRIM POT	VR500
1	10K	10K	70240025	10K-1/4W-5%-CF-T&R	R322	1	68	68	70240009	68-1/4W-5%-CF-T&R	R459	1	7812T2HS	7812	70427812	MC 7812 CT REG	VR700
1	10KP1	10KP1	70241050	10K-1/4W-1%-MF-T&R	R323	1	220	220	70240058	220-1/4W-5%-CF-T&R	R460	1	7912T2HS	7912	70427912	VR CT REG	VR701
1	47K	47K	70240031	47K-1/4W-5%-CF-T&R	R324	1	3.9K	3.9K	70241093	3.9K-1/4W-5%-CF-AXL	R461	1	*****	*****	*****	*****	*****
1	470	470	70240015	470-1/4W-5%-CF-T&R	R325	1	1K	1K	70240017	1K-1/4W-5%-CF-T&R	R462	1	*****	*****	*****	*****	*****
1	2.2K	2.2K	70240020	2.2K-1/4W-5%-CF-T&R	R326	1	270	270	70240013	270-1/4W-5%-CF-T&R	R463	1	*****	*****	*****	*****	*****
1	5.23KP1	5.23KP1	70241071	5.23K-1/4W-1%-MF-T&R	R327	2	6.8K	6.8K	70240024	6.8K-1/4W-5%-CF-T&R	R464	1	*****	*****	*****	*****	*****
1	1CKP1	1CKP1	70241050	10K-1/4W-1%-MF-T&R	R328	1	220	220	70240058	220-1/4W-5%-CF-T&R	R465	1	*****	*****	*****	*****	*****
1	4.99KP1	4.99KP1	70241060	4.99K-1/4W-1%-MF-T&R	R329	1	1K	1K	70240017	1K-1/4W-5%-CF-T&R	R466	1	*****	*****	*****	*****	*****
2	2.2K	2.2K	70240020	2.2K-1/4W-5%-CF-T&R	R330	1	4.7K	4.7K	70210023	4.7K-1/4W-5%-CF-T&R	R467	1	*****	*****	*****	*****	*****
1	10K	10K	70240025	10K-1/4W-5%-CF-T&R	R331	1	10K	10K	70210025	10K-1/4W-5%-CF-T&R	R468	1	*****	*****	*****	*****	*****
1	4.7K	4.7K	70240023	4.7K-1/4W-5%-CF-T&R	R332	1	100K	100K	70210034	100K-1/4W-5%-CF-T&R	R469	1	*****	*****	*****	*****	*****
1	12K	12K	70240057	12K-1/4W-5%-CF-T&R	R333	3	10K	10K	70210025	10K-1/4W-5%-CF-T&R	R470	1	*****	*****	*****	*****	*****
1	10K	10K	70240025	10K-1/4W-5%-CF-T&R	R334, R337	1	100K	100K	70210034	100K-1/4W-5%-CF-T&R	R471	1	*****	*****	*****	*****	*****
1	47K	47K	70240031	47K-1/4W-5%-CF-T&R	R335	1	4.7K	4.7K	70210023	4.7K-1/4W-5%-CF-T&R	R472	1	*****	*****	*****	*****	*****